# DRIVE THE CHANGE









### MAXIMUM EFFICIENCY



Endless hours of testing and □ne tuning made the C85 the best in its class for performance and reliability. We created a durable machine with maintenance cost close to none.

UNDERCARRIAGE



Our undercarriage is like no one. Our Cormidi R&D department put all its experience towards creating the best undercarriage available on the market

SIMPLY INCREDIBLE



The Cormidi design lab created a machine that mixes industrial design with strength, power and easy to use







#### STRENGTHS



The C85 puts incredible power in a compact and sturdy machine




The operators has a perfect access to all the controls and can keep all the parameters under control



The swinging bucket not only load the dumper but can unload it frontally



The window on the left side of the unit allow an immediate check of the fuel level



The design of the engine compartment allows easy access to all the component



Greasing the undercarriage is easy and fast: nothing has to be taken apart.



the diesel machine has a key protected fuel cap



Galvanized sheet, protects the moving parts from materials that could damage them



The air/water cooling system allows the machine to operate in extreme conditions







#### **STRENGTHS**



The machine can be radio controlled for dangerous jobs.



Cooling system really efficienty help work in every condition.



Maintenance free throttle.



more hydraulics has never been so easy.



A buzzer will alert the operator in case of necessity and display always allows easy reading of the working hours.



Mechanical parking and emergency brake.



Large and sturdy hooks to move the machine in total safety.



The machine's undercarriage oscillated to follow the terrain pro□le for increased stability and comfort.




When the situation needs a shorter unit, the stand can be closed, otherwise it opens to let the operator in.









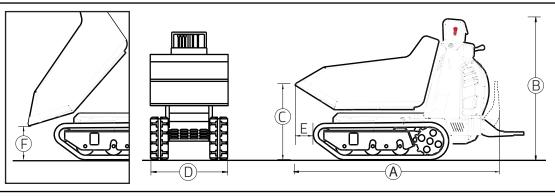

	mm		inch.
Α	2120	Α	83.5
В	1336	В	52.6
С	739	С	29.1
D	810	D	31.9
Е	285	Е	11.22
F	250	F	9.84


	C10.85	C13.85	C14.85
OPERATIVE	800 kg	800 kg	800 kg
CAPACITY	1764 Lb	1764 Lb	1764 Lb
TOTAL	566 kg	541 kg	588 kg
WEIGHT	1248 Lb		1296 Lb
STRUCK	0,28 m³ 0.37 yd³	0,28 m³ 0.37 yd³	0,28 m³
HEAPED SAE	0,36 m³	0,36 m³	0,36 m³
	0.47 yd³	0.47 yd³	0.47 yd³









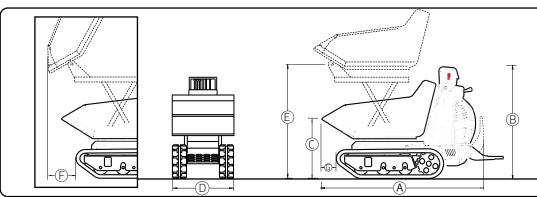

	mm		inch.
Α	1926	Α	75.8
В	1336	В	52.6
С	739	С	29.1
D	810	D	31.9
Ε	1500	Ε	59.1
F	830	F	32.7
G	260	G	10.2

	C10.85	C13.85	C14.85
OPERATIVE	800 kg	800 kg	800 kg
CAPACITY	1764 Lb	1764 Lb	1764 Lb
TOTAL	668 kg	643 kg	690 kg
WEIGHT	1472.7 Lb	1418 Lb	1521 Lb
STRUCK	0,28 m³	0,28 m³	0,28 m³
JINOCK	0.33 yd³	0.33 yd³	0.33 yd³
HEAPED SAE	0,36 m³	0,36 m³	0,36 m³
HEAPED JAE	0.45 yd³	0.45 yd³	0.45 yd³







	METRIC	U.S.	13.85	10.85	14.85
ENGINE					
Petrol	Honda Gx 390 13 hp				
Diesel	Yanmar LN 1	Yanmar LN 100 AE 10 hp			
Diesel	Kubota Z	Kubota Z 482 14 hp			•
TRANSMISSION					
Туре	Hydro	Hydrostatic			•
Hydraulic pump	Two full closed hydro	Two full closed hydrostatic transmission		•	•
TRACKS	·				
Crawler width	180 mm	180 mm (7.1 in)			
Rocking rollers	Ye	Yes			•
HYDRAULIC SYSTEM			•	•	•
Hydraulic pump	Gear p				
Flow Std	1x14,1 l/min	(1x3.7 gpm)	•		•
Tion Sta	1x12,6 l/min	(1x3.3 gpm)		•	
Hi-Flow	1x22,4 l/min		•		•
	1x19,9 l/min	(1x5,3 gpm)		•	
max pressure	150 bar	(2180 psi)	•	•	•
PERFORMANCE AND DIMENSIONS	<u>'</u>				
	(5 Kmh)	(3.1 mph)	•		
Max. travel speed	(6 Kmh)	(3.7 mph)		•	
Operative weight	800 kg	(1762 LB)	•	•	•
Vessel contents	l i	(0.37 yd³) a   (0.69 yd³)	•	•	•
Parking brake		Yes		•	•

#### **ACCESSORIES**



















## DRIVE THE CHANGE

Via Fonte, 342 Roccadaspide (SA) Italy ph. +39 0828 943688 fax +39 0828 943963

**CORMIDI** 

25 Broad St, Norwalk CT 06851, USA ph.+1 203-846-6120 art@cormidiusa.com

