

**DRIVE THE CHANGE** 

## MAXIMUM EFFICIENCY



Through thorough testing and optimization, our machines are being continuously improved to offer you the best solution for your work. Our machines are the most efficient and high-

est-performing on the market.

## UNDERCARRIAGE



We put lots of effort into creating an undercarriage track that will never come off, so you can focus on your job.

## SIMPLY AMAZING



Cormidi CMF series has become the benchmark for machines in its class. Its ability to meet customer's needs regarding great performance, extreme reliability and reduced fuel consumption is outstanding.







#### STRENGTHS



All the daily maintenance checks (such as levels, filters, and fuses) are easily accessible, reducing the time you spend on machine inspection.



All machines come with an easily-activated float option arm.



The horn is easily accessible to increase safety of operations



There is a single access point for checking the level, checking the temperature, and filling hydraulic oil.



The machines have a parking break to keep the machine safe and to use in emergencies.



The dashboard provides all your information in one place: tachometer, hour meter, fuel gauge, and alarm light.



With the Cormidi Quick Attach, you can use a different attachment each time you run the machine (dumper, miniloader, concrete mixer, etc.) Simply attach, check the configuration, and use.



Every alarm has a loud buzzer that will grab your attention.



Every attachment has safety bars and protections so you can work safely.







## THE STANDARD



CMF sets the standard for the rest of the market. Cormidi machines are the most productive, reliable, and cost-efficient.

# HEAVY DUTY MACHINE



The undercarriage is heavy duty and indestructible, making it perfect for even the toughest jobs. The rubber track's unique design is optimal for continuous performance with great traction and no wear.

## SAFE AND STRONG



Using Cormidi machines will improve work efficiency in all conditions; offering great performance, lower fuel consumption, higher speeds, and the most stability and safety in its class.







## STRENGTHS



The unique design of this undercarriage is advantageous to your work safety and provides a comfortable drive in all conditions. The rubber track is long-lasting and never comes off.rocking rollers system ensures you'll have amazing traction over a wide variety of terrains.



The machine is easy to transport anywhere you need it.



This option allows you to change the function of the levers, making the machine more comfortable and customizable to your preferences and needs.



The machine provides three auxiliary outputs that allow you to use different tools at the same time.

## ANTI-STALL POWER SYSTEM (ASPS)



The Anti-Stall Power System guarantees excellent performance by allowing you to optimize the power of the machine while running your tools. It allows you to allocate more power to the tools with speed control, ensuring your engine never overloads.



The CMF machine has a unique Hi-Flow system with two variable piston pumps with automatic constant power. This allows the machine to use the most power available and prevents the engine from stalling.

## AUTO LEVELLING (ON REQUEST)



Automatic leveling of the forks

#### UNIVERSAL FRONT PLATE



The front plate allows you to use any mini-loader attachment on the market.



When you need more space, simply fold up the platform plate for sixteen fewer inches.







# **INNOVATIVE EASY ATTACH**

#### **ONE MACHINE, 100 CONFIGURATIONS**














right	
<b>90</b> left	








$\square$	C11	150	C12	200	C13	00	C13	50	C14	+00	C1500		0 C1500 C		C1600	
	mm	in	mm	in	mm	in										
Ā	1330	52.4	1330	52.4	1330	52.4	1330	52.4	1330	52.4	1330	52.4	1330	52.4		
В	1410	55.5	1410	55.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5		
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2		
D	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2		
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1		
E	2330	91.7	2330	91.7	2460	96.9	2460	96.9	2460	96.9	2460	96.9	2460	96.9		

		C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE		1150 kg	1200 kg	1300 kg	1350 kg	1400 kg	1500 kg	1600 kg
CAPACITY		2535 Lb	2646 Lb	2866 Lb	2976 Lb	3087 Lb	3307 Lb	3527 Lb
ATTACHMENT		240 kg	240 kg	255 kg				
WEIGHT		529 Lb	529 Lb	562 Lb				
MACHINE	â	775 kg	795 kg	870 kg	890 kg	910 kg	910 kG	919 kg
WEIGHT		1709 Lb	1753 Lb	1918 Lb	1962 Lb	2006 Lb	2006 Lb	2027 Lb
TOTAL		1015 kg	1035 kg	1125 kg	1145 kg	1165 kg	1165 kg	1174 kg
WEIGHT		2238 Lb	2282 Lb	2480 Lb	2524 Lb	2568 Lb	2568 Lb	2588 Lb
STRUCK		0,38 m³	0,38 m³	0,47 m³	0,47 m³	0,50 m³	0,47 m³	0,50 m³
STROCK		0.50 yd³	0.50 yd³	0.62 yd³	0.62 yd³	0.66 yd³	0.62 yd³	0.66 yd³
		0,51 m³	0,51 m³	0,64m³	0,64 m³	0,69 m³	0,64 m³	0,69 m <sup>3</sup>
HEAPED SAE		0.67 yd³	0.67 yd³	0.84 yd³	0.84 yd³	0.90 yd³	0.84 yd³	0.90 yd³

SPE	CIF	CAT	ION	S

ECIFICATIO		~ <b></b> -				ilable for: T = -       			
			i I 💓		   	 			; .  .
									*
		   1150 kg   2535 lb	1200 kg	1200 kg 2646 lb	1300 kg	1350 kg	1400 kg	1500 kg 3307 lb	1600
INGINE		1150		12040 lb			1400Y		
Diesel	Kubota D1105 25 hp TIER 4	· •	•	1	•	•	1	1	1
Diesel	Kubota D1305 25 hp TIER 4	1	1	1	1	1	1	. •	
Diesel	Yanmar 3TNF80 24 hp TIER 4		1	•	1	1	•	1	1
TRANSMISSION		•	•					•	
Туре	Hydrostatic		•	i 🔸	•	•	•	i e	i e
Hydraulic pump 2 va	riable pistons pumps 83.2 lt/min 365bar (21.9 gpm 5230 psi)	•	•	1		1	1	1	-
Hydraulic pump 2 v	ariable pistons pumps 93 lt/min 365bar (24.6 gpm 5234 psi)		1	1	•	•	•	•	¦ •
TRACKS			•	1	1	1			
Crawler width	180 mm (7.1 in)	•	1	Ì	1	1	1	1	i
Crawler width	200 mm (7.9 in)		•	1	•	1	1	1	
Crawler width	230 mm (9.1 in)	1	!	1	1	•	•	•	
Track roller with grease	n°5	•	•	i	•	•	•	•	i •
HYDRAULIC SYSTEM									
Hydraulic pump	Gear pump	•	•	1	•	•	•	•	-
Flow std (Spec 1 - Spec 2)	1x27/min 165 bar (1x7.1gpm 2393 psi)	•	•	•	i I	1		į.	i -
Flow std (Spec 1 - Spec 2)	1x27 l/min 200 bar (1x7.1 gpm 2901 psi)	i i	1	i	•	•	•	•	¦ •
HYDRAULIC SYSTEM WIT									
Hydraulic pump	variable pistons pumps		I ● I	I ●	● 	I ● I	•	I ●	
Hi-Flow	1x46 I/min 260 bar / (1x12.2 gpm 3771 psi)	•	i •	i •	i •	•	•	i .	i
Hi Flow	1x52 l/min 260 bar / (1x13.7 gpm 3771 psi)	1		1		1		•	¦ (
ADDITIONAL HYD OUTPU									
spec-1	n° 2	•	I ●	•	1	I ● I	•	I ●	
spec-2	n° 5	•	i •	i •	i •	•	•	i •	i •
spec-3	n° 5	•	•	•	•	•	•		
PERFORMANCE AND DIME	6,9 Km/h (4.3 mph)			· .	ı	1	ł	1	1
Max. Travel Speed Max. Travel Speed	7,6 Km/h (4.7 mph)	•	● 	•	   _			1	1
			1	1	•	•	•	•	- •
Dry Weight	775 Kg (1701 lb)	•			i				
Dry Weight Dry Weight	795 Kg (1753 lb) 870 Kg (1918 lb)	1	•	I ●		1	l	1	1
Dry Weight	890 kg (1962 lb)	1	1	1	•		1	1	1
Dry Weight	910 Kg (2006 lb)			1	1			1	1
Dry Weight	-				1		•		
Dry Weight	910 Kg (2006 lb)	1	1	1	1	1	1	•	1
Parking brake	919 kg (2027 lb) Yes								
Cruise control	Yes								
	165		•	•	•	•	•	•	

	mm	mm	mm	mm	mm	mm	
	A	©	Û	M	N	Q	Z
1150	1960	1560	845	1370	250	180	42°
1200	2060	1660	865	1370	250	200	42°
1300	2160	1770	865	1370	250	200	42°
1350	2160	1770	895	1370	250	230	42°
1400	2160	1770	945	1370	250	230	42°
1500	2160	1770	895	1370	250	230	42°
1600	2160	1770	945	1370	250	230	42°

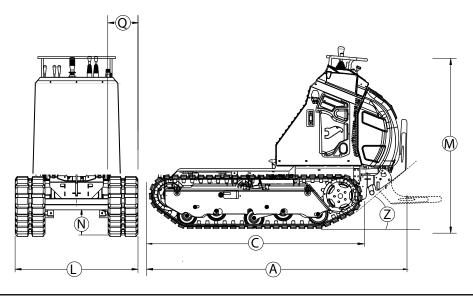







#### ACCESSORIES

#### DIRECT APPLICATION ON SELF LOADING ARM ACW-ACWX WITH ADAPTER

EN

The photos in catalogues and brochures represent the Cormidi machines in s shown in this catalogue or brochure.

varning.

5

ase note: ributor fo rmidi rese

printing. How

efore please consult your

Drill .	A.	Brush		Trencher	
Tiller 🔊		snow thrower	-A	Rotational grass cutter	
Power rake		Hydraulic hammer	Ţ	6-position dozer blade	
Excavator	X	Log bucket		Sweeper bucket with collection	
Polyp grab		Heavy duty profile low bucket		4 in 1 bucket	
Sifter bucket		Wheel milling machine		Forks	
DIRECT APPL	ICATION ON SELF	LOADING ARM	ACW-ACWX		
Forks		snow blade		Excavator	pr.

#### **Radio control**

#### Available on request on the CMF range



Via Fonte, 342 Roccadaspide (SA) Italy ph. +39 0828 943688 fax +39 0828 943963

**CORMIDI** info@cormidi.com - www.cormidi.com 25 Broad St, Norwalk CT 06851, USA ph.+1 203-846-6120 art@cormidiusa.com